PAC250M

PACKAGED AIR-COOLED 25 HP MULTIPLE CIRCUIT SCROLL

DIMENSIONAL DRAWINGS

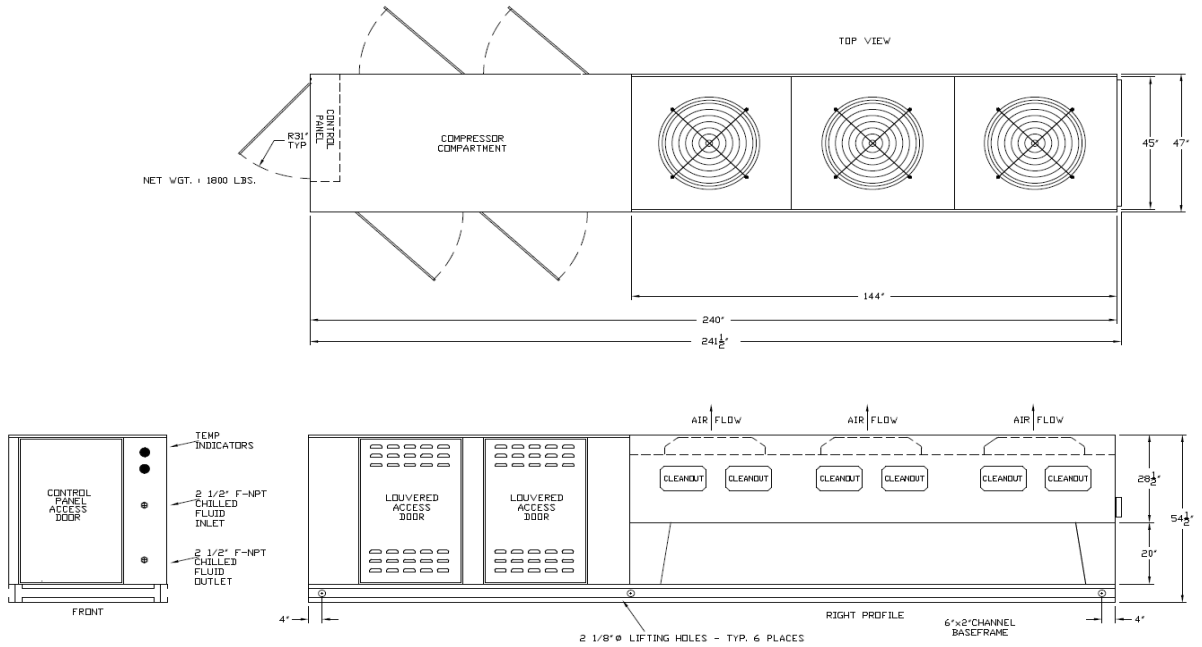

LENGTH	WIDTH	HEIGHT	WEIGHT	FLUID CONNECTIONS
241.5"	47"	54.5"	1800 LBS	2 1/2" F-NPT

PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. SUCTION TEMP. RANGE	LFT	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
		°F	TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	25°F to 55°F	35	19.8	9.4	18.8	8.2	18.3	7.6	17.8	7.1	17.4	6.6
		45	24.0	11.2	22.9	9.8	22.4	9.1	21.9	8.6	21.3	8.0
		55	28.7	13.1	27.4	11.5	26.9	10.8	26.4	10.1	25.7	9.4
		65	33.8	15.1	32.6	13.4	31.8	12.5	31.2	11.7	30.6	11.0
R404A	-10°F to 45°F	0	11.9	5.9	10.7	4.8	10.1	4.2	9.5	3.8	8.9	3.4
		10	14.8	7.1	13.5	5.8	12.8	5.3	12.1	4.7	11.4	4.2
		25	20.1	9.2	18.4	7.7	17.6	6.9	16.7	6.3	15.8	5.6
		40	26.1	11.5	24.0	9.6	23.0	8.8	21.9	8.0	20.9	7.2
		55	32.7	13.8	30.2	11.6	28.9	10.6	27.7	9.7	26.4	8.8

DRAKE REFRIGERATION INC
2900 SAMUEL DRIVE
BENSALEM, PA 19020
(888) 289-7299
www.drakechillers.com

*ALL INFORMATION ***FOR REFERENCE ONLY***

PAC250M

PACKAGED AIR-COOLED 25 HP MULTIPLE CIRCUIT SCROLL

STANDARD FEATURES

FEATURE	BENEFIT
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236
Microprocessor Control	Stand alone, simple, accurate control with over 10 years of field testing
Stainless Steel Brazed Plate Evaporator	Corrosion resistant evaporator wrapped in closed cell insulation
Copeland Scroll Compressor	Industry leader, long lasting compressor
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid from entering the compressor
Water Flow Switch	Protects against process fluid freezing caused by fluid pump failure
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance
Insulated Process Fluid Lines	Maximum thermal efficiency
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in working order
Full Refrigerant Charge	Hassle free and more efficient installation
NEMA 3R Rated Electrical	Indoor/outdoor use

AVAILABLE OPTIONS

OPTIONS	AVAILABLE
Controls	BMS, BAS communications, remote access, monitoring services
Extended Warranty	4 year extended compressor warranty
Electrical	Compressor fusing, phase monitors, disconnects and more
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils
Low Ambient Protection	Head pressure control for low ambient temperatures down to -20°F
Other	Casters, service outlets, city water add-ons, heaters, etc.

More options and customization available, contact factory for information: **(888) 289 - 7299**

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

S2 (208-230/1/60)

PRODUCT INFORMATION

MODELS AVAILABLE		COMPRESSOR			FAN MOTOR		RLA EA	LRA EA	MCA	MOP	RECIRC. TANK
R407C	R404A	MODEL	QTY	HP	QTY	FLA EA					
PAC250M3-S2-Z		ZB42KCE	5	5	1	3.3	27.9	129	150	175	N/A
PAC250M6-S2-Z		ZB42KCE	5	5	1	3.3	31.4	129	170	195	N/A

DRAKE REFRIGERATION INC
2900 SAMUEL DRIVE
BENSALEM, PA 19020
(888) 289-7299
www.drakechillers.com

*ALL INFORMATION ***FOR REFERENCE ONLY***