


EST12S

SPLIT-SYSTEM AIR-COOLED 1.5 HP SINGLE CIRCUIT SCROLL WITH TANK

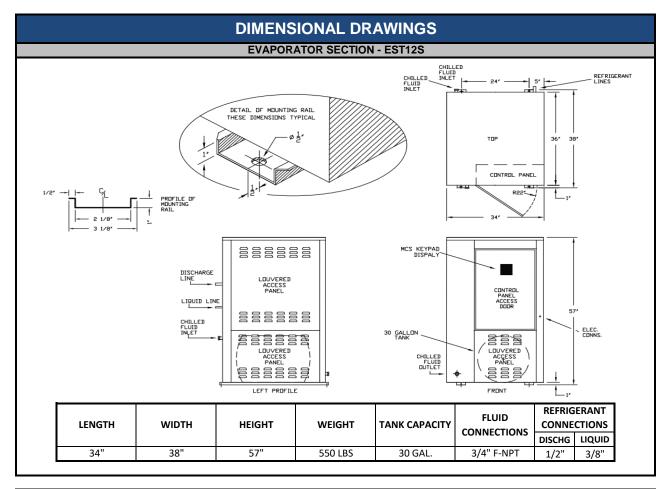

PRODUCT PERFORMANCE INFORMATION												
REFRIGERANT	COMPRESSOR OPER.	LFT	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
	SUCTION TEMP. RANGE	°F	TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	25°F to 55°F	40	1.1	7.5	1.1	6.6	1.0	6.1	1.0	5.8	1.0	5.5
		50	1.4	9.0	1.3	8.0	1.3	7.4	1.2	7.0	1.2	6.6
		60	1.7	10.9	1.6	9.6	1.5	8.9	1.5	8.3	1.4	7.8
		70	2.0	13.2	1.9	11.6	1.8	10.9	1.7	10.0	1.7	9.3
R404A	-10°F to 45°F	5	0.6	4.5	0.6	3.9	0.6	3.7	0.5	3.4	0.5	3.2
		15	0.7	5.0	0.7	4.4	0.6	4.1	0.6	3.8	0.6	3.6
		30	1.0	6.6	0.9	5.7	0.9	5.3	0.8	4.9	0.8	4.6
		45	1.3	8.7	1.2	7.5	1.2	6.9	1.1	6.4	1.1	6.0
		60	1.8	11.5	1.6	9.9	1.6	9.2	1.5	8.4	1.4	7.8


DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com



EST12S

SPLIT-SYSTEM AIR-COOLED 1.5 HP SINGLE CIRCUIT SCROLL WITH TANK

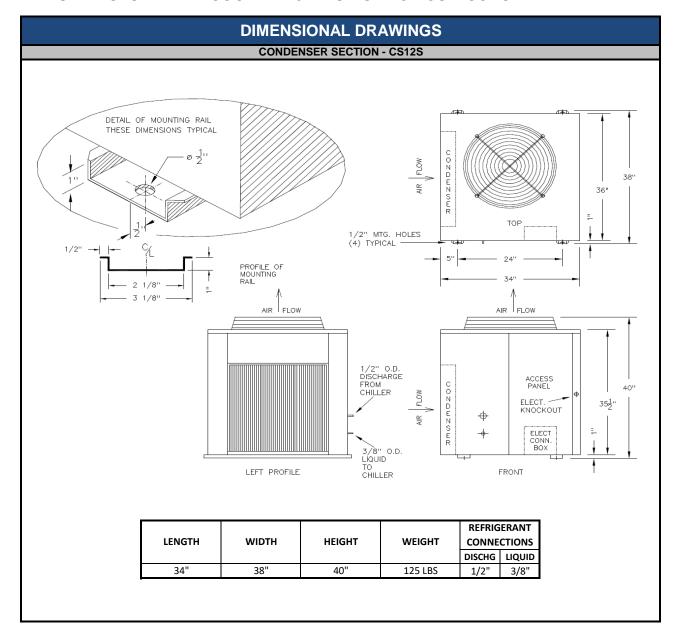

DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com



EST12S

SPLIT-SYSTEM AIR-COOLED 1.5 HP SINGLE CIRCUIT SCROLL WITH TANK

STANDARD FEATURES							
FEATURE	BENEFIT						
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236						
Micro Control Systems Controller	Open source, microprocessor built to operate in the HVAC/R industry						
Controls	BMS, BAS communications, remote access, monitoring services						
Stainless Steel Brazed Plate Evaporator	Corrosion resistant, fully insulated and selected upon requirements						
Copeland Scroll Compressor	Industry leader, long lasting compressor						
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup						
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid						
Suction Accumulator	from entering the compressor						
Water Flow Switch	Protects against process fluid freezing caused by pump failure						
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control						
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM						
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance						
Insulated Process Fluid Lines	Maximum thermal efficiency						
Factory Tostad	Ensures the unit meets the customer's performance designed criteria and arrives in						
Factory Tested	working order						
Full Refrigerant Charge	Hassle free and more efficient installation						
Chaireless Charl Characa Tauly	Closed cell insulation for increase temperature control with reliable, corrosion resistan						
Stainless Steel Storage Tank	stainless steel recirculation pump						
NEMA 3R Rated Electrical	Indoor/outdoor use						
Phase Monitors	Electrical protection for compressors						

AVAILABLE OPTIONS								
OPTIONS AVAILABLE								
Extended Warranty	4 year extended compressor warranty							
Electrical	Compressor fusing, disconnects, circuit breakers and more							
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options							
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more							
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils							
Low Ambient Protection	EC fan for temperature down to +10°F, Head pressure control for temperatures down							
Low Ambient Protection	20°F, Heated receivers for temperature down to -40°F							
Other	Casters, service outlets, city water add-ons, heaters, etc.							
More options and customization available, contact factory for information: (888) 289 - 7299								

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

S2 (208-230/1/60)

PRODUCT INFORMATION										
MODELS AVAILABLE	COMPRESSOR			FAN N	RLA EA	LRA	МСА	МОР	EVAP. PUMP EA	
R407C R404A	MODEL	QTY	HP	QTY	FLA EA	EA	EA			
EST12S3-S2-Z	ZS11KAE	1	1.5	1	3.3	10.7	55	25	30	4.1
EST12S6-S2-Z	ZS11KAE	1	1.5	1	3.3	12.6	55	25	35	4.1

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com