


EST70S

SPLIT-SYSTEM AIR-COOLED 8 HP SINGLE CIRCUIT SCROLL WITH TANK

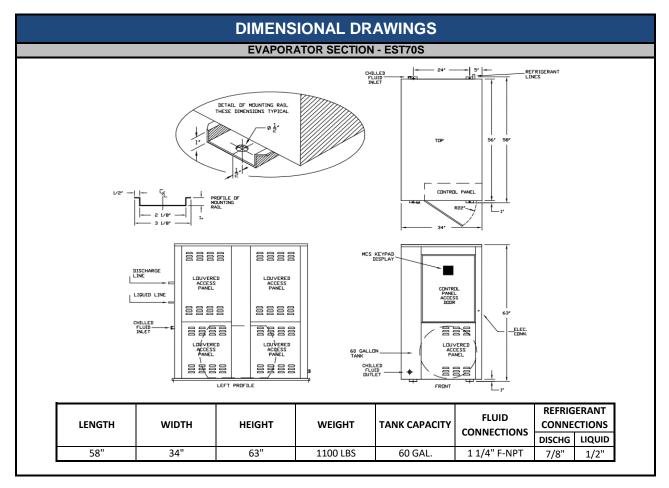

| PRODUCT PERFORMANCE INFORMATION | | | | | | | | | | | | |
|---------------------------------|---------------------|-----|----------|------|----------|------|----------|------|-----------|------|-----------|------|
| REFRIGERANT | COMPRESSOR OPER. | LFT | 80°F AMB | | 90°F AMB | | 95°F AMB | | 100°F AMB | | 105°F AMB | |
| | SUCTION TEMP. RANGE | °F | TONS | EER | TONS | EER | TONS | EER | TONS | EER | TONS | EER |
| R407C | 25°F to 55°F | 40 | 5.9 | 10.4 | 5.5 | 8.8 | 5.3 | 8.1 | 5.1 | 7.5 | 4.9 | 6.8 |
| | | 50 | 7.3 | 12.4 | 6.8 | 10.7 | 6.6 | 9.9 | 6.4 | 9.1 | 6.2 | 8.4 |
| | | 60 | 8.8 | 14.7 | 8.4 | 12.8 | 8.1 | 11.8 | 7.9 | 10.9 | 7.6 | 10.1 |
| | | 70 | 10.6 | 17.0 | 10.0 | 14.9 | 9.8 | 13.8 | 9.6 | 12.9 | 9.2 | 11.9 |
| R404A | -10°F to 45°F | 5 | 3.1 | 5.4 | 2.7 | 4.3 | 2.6 | 3.8 | 2.4 | 3.4 | 2.2 | 2.9 |
| | | 15 | 4.0 | 6.7 | 3.6 | 5.5 | 3.4 | 4.9 | 3.1 | 4.4 | 2.9 | 3.9 |
| | | 30 | 5.5 | 8.9 | 5.0 | 7.3 | 4.7 | 6.6 | 4.5 | 6.0 | 4.2 | 5.3 |
| | | 45 | 7.3 | 11.1 | 6.6 | 9.3 | 6.3 | 8.5 | 5.9 | 7.7 | 5.6 | 6.9 |
| | | 60 | 9.2 | 13.3 | 8.3 | 11.2 | 7.9 | 10.3 | 7.5 | 9.4 | 7.1 | 8.5 |


DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com



EST70S

SPLIT-SYSTEM AIR-COOLED 8 HP SINGLE CIRCUIT SCROLL WITH TANK

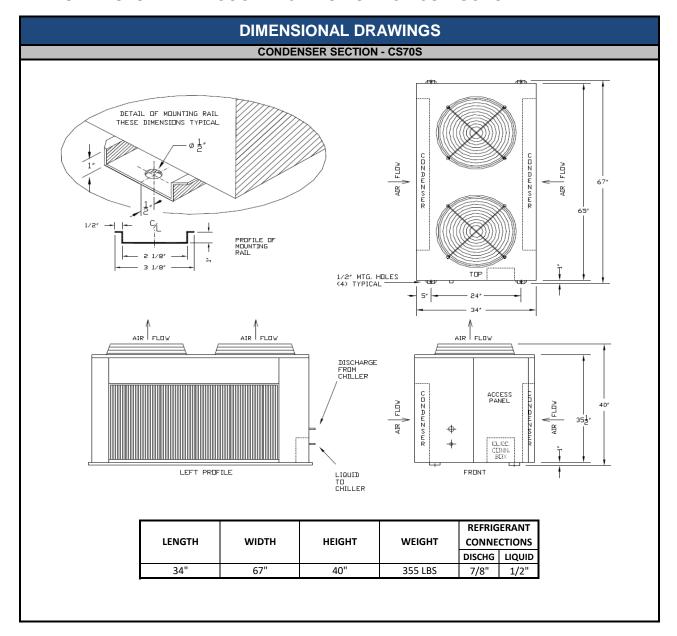

DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com



EST70S

SPLIT-SYSTEM AIR-COOLED 8 HP SINGLE CIRCUIT SCROLL WITH TANK

| STANDARD FEATURES | | | | | | | |
|---|---|--|--|--|--|--|--|
| FEATURE | BENEFIT | | | | | | |
| Listings | ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236 | | | | | | |
| Micro Control Systems Controller | Open source, microprocessor built to operate in the HVAC/R industry | | | | | | |
| Controls | BMS, BAS communications, remote access, monitoring services | | | | | | |
| Stainless Steel Brazed Plate Evaporator | Corrosion resistant, fully insulated and selected upon requirements | | | | | | |
| Copeland Scroll Compressor | Industry leader, long lasting compressor | | | | | | |
| Compressor Crankcase Heater | Prevents compressor damage caused by cold refrigerant on startup | | | | | | |
| Suction Accumulator | Protects the compressor from damage caused by liquid flood back by preventing liquid | | | | | | |
| Suction Accumulator | from entering the compressor | | | | | | |
| Water Flow Switch | Protects against process fluid freezing caused by pump failure | | | | | | |
| Hot Gas Bypass | Aids in the prevention of evaporator freeze ups and capacity control | | | | | | |
| Copper Tube/Aluminum Fin Condenser | Rust resistant and high CFM | | | | | | |
| Painted Galvanized Steel Metal Cabinet | Sturdy, corrosion resistance, professional appearance | | | | | | |
| Insulated Process Fluid Lines | Maximum thermal efficiency | | | | | | |
| Factory Tested | Ensures the unit meets the customer's performance designed criteria and arrives in | | | | | | |
| ractory rested | working order | | | | | | |
| Full Refrigerant Charge | Hassle free and more efficient installation | | | | | | |
| Stainless Steel Storage Tank | Closed cell insulation for increase temperature control with reliable, corrosion resistan | | | | | | |
| Staffiess Steel Storage Talik | stainless steel recirculation pump | | | | | | |
| NEMA 3R Rated Electrical | Indoor/outdoor use | | | | | | |
| Phase Monitors | Electrical protection for compressors | | | | | | |

| AVAILABLE OPTIONS | | | | | | | |
|---|---|--|--|--|--|--|--|
| OPTIONS | AVAILABLE | | | | | | |
| Extended Warranty | 4 year extended compressor warranty | | | | | | |
| Electrical | Compressor fusing, disconnects, circuit breakers and more | | | | | | |
| Stainless Steel Pumps | 1/3 HP to 25 HP on board pumps in multiple configurations & options | | | | | | |
| Fluid Piping Upgrades | Flow meters, pressure gauges, low flow bypass valves, and more | | | | | | |
| Coastal Protection/Hazardous Environments | Heresite coating, "Gold" and Copper condenser coils | | | | | | |
| Low Ambient Protection | EC fan for temperature down to +10°F, Head pressure control for temperatures down t | | | | | | |
| Low Ambient Protection | 20°F, Heated receivers for temperature down to -40°F | | | | | | |
| Other | Casters, service outlets, city water add-ons, heaters, etc. | | | | | | |
| More options and customization available, contact factory for information: (888) 289 - 7299 | | | | | | | |

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

T3 (208-230/3/60) --- T4 (460/3/60) --- T5 (575/3/60)

| PRODUCT INFORMATION | | | | | | | | | | |
|---------------------|------------|-----|-----------|-----|-----------|------|-----|-----|---------------|-----|
| MODELS AVAILABLE | COMPRESSOR | | FAN MOTOR | | RLA EA | LRA | MCA | МОР | EVAP. PUMP EA | |
| R407C R404A | MODEL | QTY | HP | QTY | FLA EA | EA | EA | | | |
| EST70S3-T3-Z | | | | | 3.3 | 32.1 | 195 | 55 | 80 | 3.7 |
| EST70S3-T4-Z | ZB58KCE | 1 8 | 8 | 2 | 1.6 | 16.4 | 95 | 30 | 40 | 1.9 |
| EST70S3-T5-Z | | | | | 1.9 | 12 | 80 | 20 | 30 | 1.2 |
| EST70S6-T3-Z | | 1 | 8 | 2 | 3.3 | 30.7 | 195 | 50 | 75 | 3.7 |
| EST70S6-T4-Z | ZB58KCE | | | | 1.6 | 16.4 | 95 | 30 | 40 | 1.9 |
| EST70S6-T5-Z | | | | 1.9 | 12.9 | 80 | 25 | 30 | 1.2 | |

DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com