




®

EST96D

SPLIT-SYSTEM AIR-COOLED 10 HP DUAL CIRCUIT SCROLL WITH TANK

DIMENSIONAL DRAWINGS

EVAPORATOR SECTION - EST96D

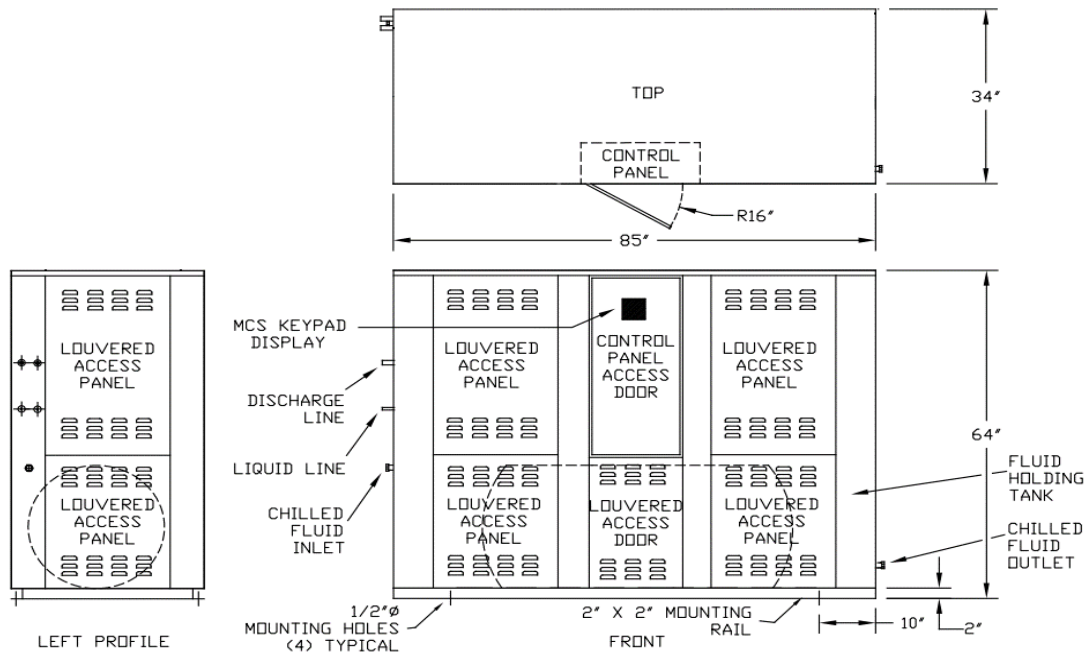

LENGTH	WIDTH	HEIGHT	WEIGHT	TANK CAPACITY	FLUID CONNECTIONS	REFRIGERANT CONNECTIONS	
						DISCHG	LIQUID
85"	34"	64"	1400 LBS	90 GAL.	1 1/4" F-NPT	3/4"	1/2"

PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. SUCTION TEMP. RANGE	LFT °F	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
			TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	25°F to 55°F	40	7.6	11.2	7.1	9.5	6.9	8.8	6.6	8.1	6.4	7.4
		50	9.3	13.2	8.8	11.3	8.5	10.5	8.3	9.7	8.0	9.0
		60	11.3	15.2	10.7	13.2	10.4	12.4	10.1	11.4	9.8	10.7
		70	13.4	17.2	12.8	15.2	12.5	14.2	12.1	13.2	11.8	12.3
R404A	-10°F to 45°F	5	4.1	5.7	3.7	4.7	3.5	4.3	3.3	3.8	3.1	3.4
		15	5.2	7.1	4.7	5.9	4.5	5.3	4.2	4.8	4.0	4.3
		30	7.3	9.4	6.6	7.9	6.3	7.2	6.0	6.6	5.6	5.9
		45	9.6	11.8	8.8	10.0	8.4	9.2	8.0	8.4	7.6	7.6
		60	12.1	13.9	11.2	11.9	10.7	11.0	10.2	10.2	9.8	9.3

DRAKE REFRIGERATION INC
 2900 SAMUEL DRIVE
 BENSALEM, PA 19020
 (888) 289-7299
www.drakechillers.com

*ALL INFORMATION **FOR REFERENCE ONLY**




®

EST96D

SPLIT-SYSTEM AIR-COOLED 10 HP DUAL CIRCUIT SCROLL WITH TANK

DIMENSIONAL DRAWINGS

CONDENSER SECTION - CS96D

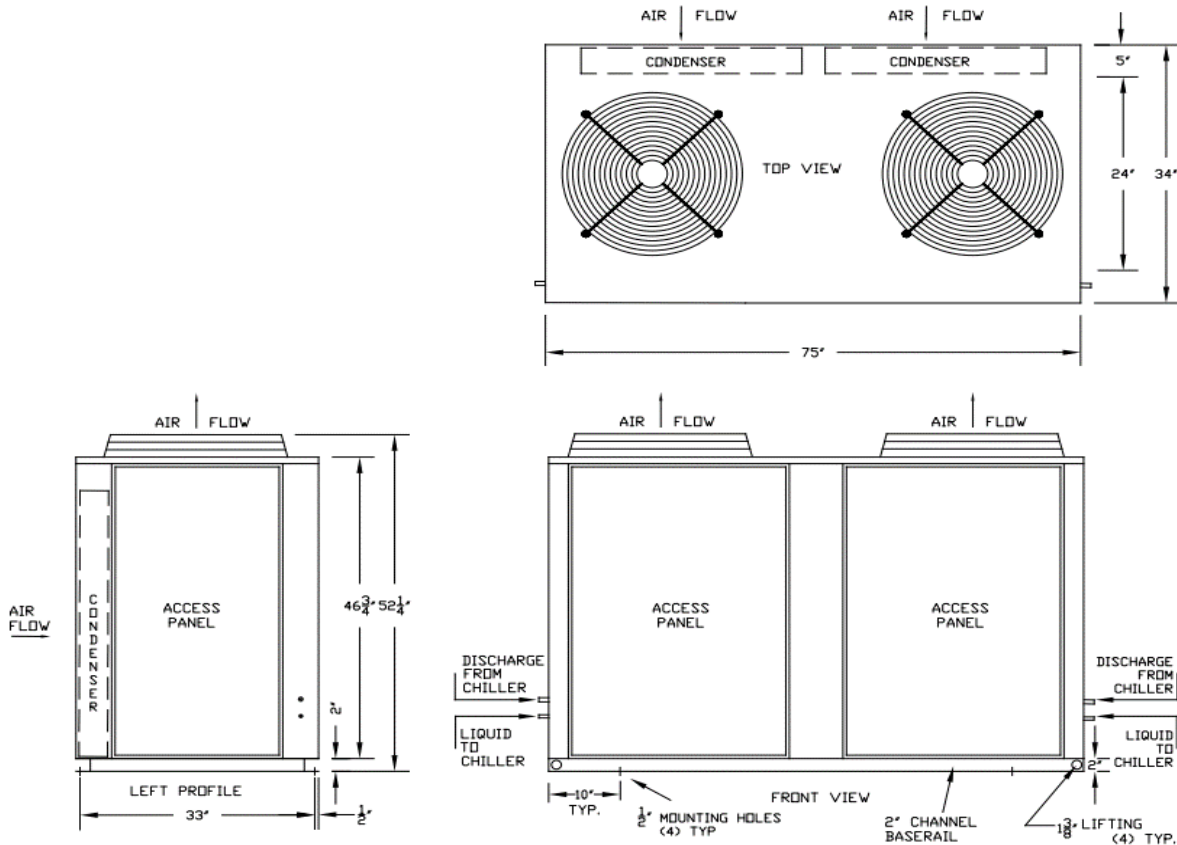

LENGTH	WIDTH	HEIGHT	WEIGHT	REFRIGERANT CONNECTIONS	
				DISCHG	LIQUID
75"	34"	52.25"	525 LBS	3/4"	1/2"

DRAKE REFRIGERATION INC
 2900 SAMUEL DRIVE
 BENSALEM, PA 19020
 (888) 289-7299
www.drakechillers.com

*ALL INFORMATION **FOR REFERENCE ONLY**



EST96D

SPLIT-SYSTEM AIR-COOLED 10 HP DUAL CIRCUIT SCROLL WITH TANK

STANDARD FEATURES

FEATURE	BENEFIT
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236
Micro Control Systems Controller	Open source, microprocessor built to operate in the HVAC/R industry
Controls	BMS, BAS communications, remote access, monitoring services
Stainless Steel Brazed Plate Evaporator	Corrosion resistant, fully insulated and selected upon requirements
Copeland Scroll Compressor	Industry leader, long lasting compressor
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid from entering the compressor
Water Flow Switch	Protects against process fluid freezing caused by pump failure
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance
Insulated Process Fluid Lines	Maximum thermal efficiency
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in working order
Full Refrigerant Charge	Hassle free and more efficient installation
Stainless Steel Storage Tank	Closed cell insulation for increase temperature control with reliable, corrosion resistant, stainless steel recirculation pump
NEMA 3R Rated Electrical	Indoor/outdoor use
Phase Monitors	Electrical protection for compressors

AVAILABLE OPTIONS

OPTIONS	AVAILABLE
Extended Warranty	4 year extended compressor warranty
Electrical	Compressor fusing, disconnects, circuit breakers and more
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils
Low Ambient Protection	EC fan for temperature down to +10°F, Head pressure control for temperatures down to 20°F, Heated receivers for temperature down to -40°F
Other	Casters, service outlets, city water add-ons, heaters, etc.

More options and customization available, contact factory for information: (888) 289 - 7299

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

S2 (208-230/1/60) --- T3 (208-230/3/60) --- T4 (460/3/60) --- T5 (575/3/60)

PRODUCT INFORMATION

MODELS AVAILABLE	COMPRESSOR			FAN MOTOR		RLA EA	LRA EA	MCA	MOP	EVAP. PUMP FLA
	MODEL	QTY	HP	QTY	FLA EA					
R407C R404A										
EST96D3-S2-Z	ZB38KCE	2	5 EA	2	3.3	30.1	175	90	115	11.1
EST96D3-T3-Z					3.3	20.7	128	60	80	6.4
EST96D3-T4-Z					1.6	8.9	63	30	35	3.1
EST96D3-T5-Z					1.9	7.1	50	25	25	2.3
EST96D6-S2-Z	ZB38KCE	2	5 EA	2	3.3	31.1	175	90	115	11.1
EST96D6-T3-Z					3.3	22.1	128	65	80	6.4
EST96D6-T4-Z					1.6	9.6	63	30	35	3.1
EST96D6-T5-Z					1.9	7.1	50	25	25	2.3

DRAKE REFRIGERATION INC
 2900 SAMUEL DRIVE
 BENSALEM, PA 19020
 (888) 289-7299
www.drakechillers.com

*ALL INFORMATION FOR REFERENCE ONLY