


PACKAGED AIR-COOLED 10 HP SINGLE CIRCUIT SEMI-HERMETIC

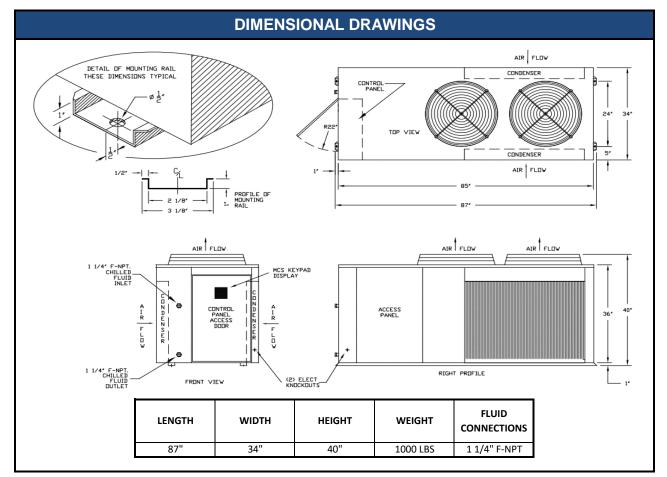

PRODUCT PERFORMANCE INFORMATION												
REFRIGERANT	COMPRESSOR OPER.	LFT	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
	TEMP. SUCTION RANGE	۴F	TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	10°F to 55°F	20	6.3	8.0	5.7	7.0	5.5	6.6	5.2	6.2	4.9	5.8
		35	8.5	9.5	7.9	8.4	7.6	7.9	7.3	7.4	7.0	7.0
		45	10.1	10.6	9.4	9.3	9.1	8.7	8.7	8.1	8.4	7.7
		55	11.8	11.8	11.0	10.2	10.6	9.5	10.2	8.8	9.8	8.3
		65	13.4	13.0	12.5	11.1	12.0	10.3	11.6	9.5	11.1	8.8
R404A	-10°F to 45°F	0	4.4	5.9	4.0	5.2	3.8	4.9	3.5	4.5	3.3	4.2
		10	5.6	6.8	5.0	6.0	4.8	5.6	4.6	5.2	4.3	4.9
		25	7.6	8.2	7.0	7.2	6.6	6.7	6.3	6.2	6.0	5.8
		40	9.9	9.5	9.0	8.2	8.6	7.7	8.2	7.2	7.8	6.7
		55	12.4	10.8	11.3	9.3	10.8	8.7	10.3	8.1	9.8	7.5

DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com



PAC100S-S

PACKAGED AIR-COOLED 10 HP SINGLE CIRCUIT SEMI-HERMETIC

STANDARD FEATURES							
FEATURE	BENEFIT						
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236						
Micro Control Systems Controller	Open source, microprocessor built to operate in the HVAC/R industry						
Controls	BMS, BAS communications, remote access, monitoring services						
Stainless Steel Brazed Plate Evaporator	Corrosion resistant, fully insulated and selected upon requirements						
Copeland Semi-Hermetic Compressor	Industry leader, rebuildable, long lasting compressor						
Variable Capacity Control	Allows for soft-start and stepped capacity control from 50-100%						
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup						
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liqu						
Saction Accumulator	from entering the compressor						
Water Flow Switch	Protects against process fluid freezing caused by pump failure						
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM						
Compressor Vibration Eliminators	Eliminates vibration transfer and reduces noise						
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance						
Insulated Process Fluid Lines	Maximum thermal efficiency						
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in						
ractory resteu	working order						
Full Refrigerant Charge	Hassle free and more efficient installation						
NEMA 3R Rated Electrical	Indoor/outdoor use						
Phase Monitors	Electrical protection for compressors						

AVAILABLE OPTIONS							
OPTIONS	AVAILABLE						
Extended Warranty	4 year extended compressor warranty						
Compressors	Equivalent compressors available from Bitzer and Carlyle						
Electrical	Compressor fusing, disconnects, circuit breakers and more 1/3 HP to 25 HP on board pumps in multiple configurations & options						
Stainless Steel Pumps							
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more						
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils						
Low Ambient Protection	EC fan for temperature down to +10°F, Head pressure control for temperatures down to						
Low Ambient Protection	20°F, Heated receivers for temperature down to -40°F						
Other	Casters, service outlets, city water add-ons, heaters, etc.						
More options and customization available, contact factory for information: (888) 289 - 7299							

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

T3 (208-230/3/60) --- T4 (460/3/60) --- T5 (575/3/60)

PRODUCT INFORMATION										
MODELS AVAILABLE	COMPRESSOR		FAN MOTOR		RLA EA	LRA EA	мса	мор	RECIRC. TANK	
R407C R404A	MODEL	QTY	HP	QTY	FLA EA	EA	EA			TAINK
PAC100S3-T3-S		1	10	2	3.3	43.6	215	60	100	
PAC100S3-T4-S	3DPHR12ME				1.6	20	106	30	45	N/A
PAC100S3-T5-S					1.9	16.5	84	25	40	[
PAC100S6-T3-S					3.3	43.6	215	70	100	
PAC100S6-T4-S	3DPHR12ME	1	10	10 2	1.6	20	106	30	45	N/A
PAC100S6-T5-S					1.9	16.5	84	25	40	

DRAKE REFRIGERATION INC

2900 SAMUEL DRIVE BENSALEM, PA 19020 (888) 289-7299 www.drakechillers.com